

Performance Analysis of Long Shunt Self Excited Induction Generators

Vijaya Sharma and *Dheeraj Joshi

Delhi Technological University, Delhi Bawana road, Rohini, Delhi, India

Abstract

The Subject of this paper is to analyse the Self Excited Induction Generators operating in long Shunt configuration. A simulink model of long shunt self excited induction generator (SEIG) has been developed using Matrix Laboratory (MATLAB) (R2010a) user friendly toolbox. The results are verified by conducting experiments on the same SEIG. Different results are taken for different loading conditions. The values of Shunt and Series capacitance is also changed for different loads and the performance is analysed.

Keywords: Self excited induction generators, shunt capacitance, series capacitance

***Author for Correspondence:** Email ID: ee.dheeraj@gmail.com

INTRODUCTION

The Wind Energy systems are becoming more and more popular nowadays due to environmental considerations.

The Self Excited Induction Generators (SEIG) mainly driven by wind turbine. The SEIG are nothing but Induction Generators excited by capacitors. The rating of capacitance should be greater than the minimum value (C_{min}) of capacitance which has to be calculated using different algorithm.

If capacitance value is below C_{min} the the SEIG will fail to excite and voltage will be zero^[1].

The SEIG suffers from problem of Voltage Regulation. Both Long shunt and Short shunt configurations are used to regulate the voltage but the long shunt can maintain lower voltages while short shunt has better higher voltage regulation^[2].

Paper^[5] shows that the optimum value of shunt capacitance C_{sh} for both shunt and

short shunt configuration are same while for long shunt it is different.

In this paper the performance of Long shunt is carried out with different values of shunt capacitance.

SIMULINK MODEL

In this model the Induction Generator is excited by Shunt capacitance C_{sh} as well as Series capacitance C_{se} .

In this model commonly known as long shunt configuration, three set of resistive loads 400 Ω , 350 Ω , 300 Ω are taken. The SEIG is made to operate under these three different loads using different values of C_{sh} , C_{se} and rotor speed W .

Results for the experimental and simulated are compared.

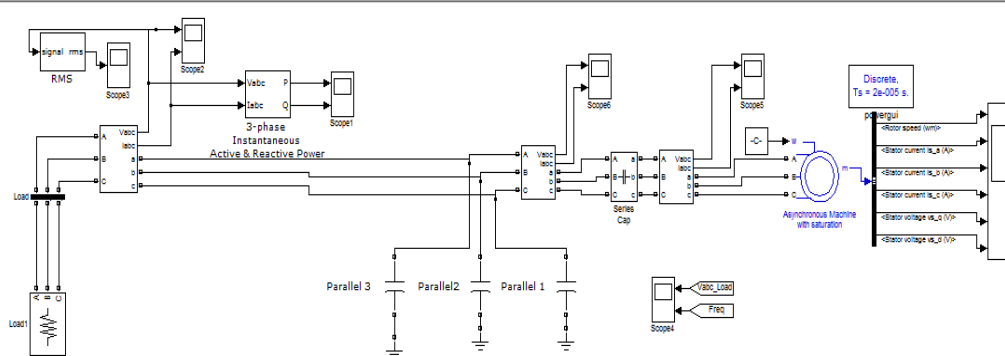


Fig. 1: Simulink Model of Long Shunt SEIG.

RESULTS AND DISCUSSIONS

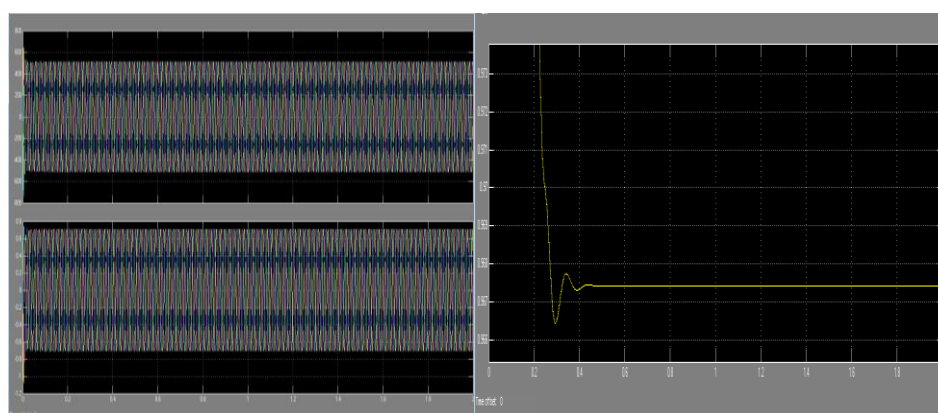


Fig. 2: Plot of V Vs Time and I Vs Time. Fig. 3: Plot of Vabc Vs Time and Iabc Vs Time.

In Figure 4 the graph shows voltage and current generated by the SEIG. It can be seen that the voltages and currents generated in all the three phases are

balanced. The graph shows the frequency which is maintained at 0.9675 pu for the same value of load.

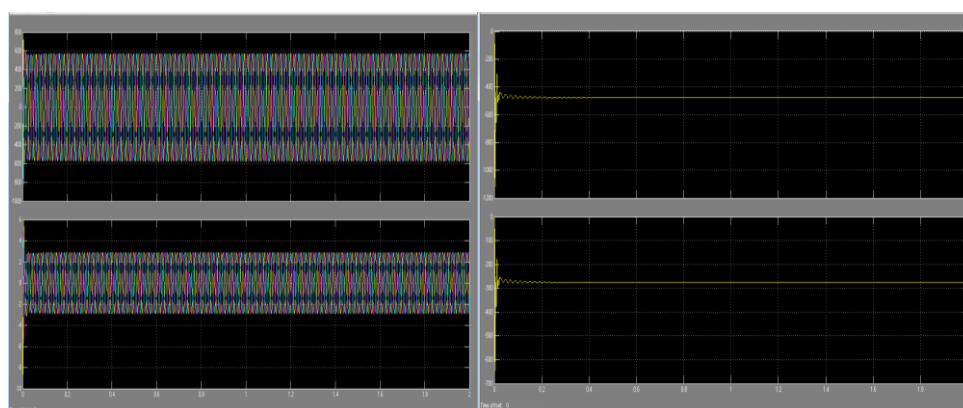


Fig. 4: Plot of Freq Vs Time.

Fig. 5: Plot of P Vs Time and Q Vs Time.

Graph shows that Active Power P is equal to 476 Watts and Reactive Power is equal to 275 Watts. Comparisons for the

various experimental and simulated results are listed in table mentioned below

Table 1: Comparison for Load Voltages and Load currents.

	Csh μ f	Cse μ f	Load Ω	Speed pu	Load voltage pu		Load Current pu	
					Exp	Sim	Exp	Sim
1	29	268	400	0.976	1.0023	0.9354	0.2895	0.2266
2	29	268	350	0.9898	1	0.9592	0.3579	0.2643
3	29	268	300	0.983	1.0024	0.9252	0.2947	0.2977
4	29	280	400	0.9458	1.0002	0.8703	0.3368	0.2103
5	29	280	350	0.9518	1.0018	0.8749	0.2737	0.2419
6	29	280	300	0.9585	1.0078	0.87495	0.3158	0.2902
7	29	230	400	0.97	1.0015	0.8936	0.3789	0.2169
8	29	230	350	0.975	0.998	0.9122	0.2947	0.2456
9	29	230	300	0.9906	1	1.1076	0.3474	0.2977
10	27	206	400	1.018	0.9957	0.9606	0.3895	0.2326
11	27	206	350	1.0032	0.9981	0.9122	0.2737	0.2512
12	27	206	300	1.0314	1.0018	0.968	0.3263	0.3126
13	25.6	200	400	1.028	1.0013	0.9494	0.3895	0.2307
14	25.6	200	350	1.0316	1.0018	0.9494	0.2842	0.2624
15	25.6	200	300	1.036	1.0002	0.9429	0.3158	0.304
16	24.6	200	400	1.0434	1.0031	0.9662	0.3895	0.2345
17	24.6	200	350	1.0488	1.0026	0.968	0.2737	0.2605
18	24.6	200	300	1.0436	1.0005	0.9401	0.3263	0.3015

Table 1 shows Effect on Load Voltage and Load current as the value of Csh, Cse and speed is changed. The performance is checked by applying three set of loads.

Table 2: Comparison for Stator Voltages and Stator Currents.

	Csh μ f	Cse μ f	Load Ω	Speed pu	Stator current pu		Stator voltage pu	
					Exp	Sim	Exp	Sim
1	29	268	400	0.976	0.9474	1.02344	0.152632	1.04249
2	29	268	350	0.9898	0.9737	1.0718	1.078947	1.070418
3	29	268	300	0.983	0.9474	1.03833	1.065789	1.032255
4	29	280	400	0.9458	1	0.968	1.052632	0.968
5	29	280	350	0.9518	1	0.9602	1.039474	0.9736
6	29	280	300	0.9585	1	0.9787	1.078947	0.9739
7	29	230	400	0.97	1	0.975	1.021053	1.01457
8	29	230	350	0.975	1	0.9974	1.026316	1.01643
9	29	230	300	0.9906	0.9474	1.04205	1.026316	1.046217
10	27	206	400	1.018	1	1.0234	1.131579	1.09834
11	27	206	350	1.0032	1.0562	0.9676	1.105263	1.0387
12	27	206	300	1.0314	1.0562	1.079	1.105263	1.1
13	25.6	200	400	1.028	1.0562	0.9713	1.105263	1.0797
14	25.6	200	350	1.0316	1	1.1755	1.118421	1.0726
15	25.6	200	300	1.036	0.9474	0.9936	1.118421	1.07228
16	24.6	200	400	1.0434	1	0.9862	1.118421	1.09462
17	24.6	200	350	1.0488	0.9474	0.9974	1.128947	1.09834
18	24.6	200	300	1.0436	0.9474	0.97134	1.118421	1.0648

Table 2 shows Effect on Stator Voltage and Stator Current as the value of Csh, Cse and speed is changed.

Table 3: Comparison of Frequency.

	Csh μf	Cse μf	Load Ω	Speed pu	Frequency pu		Stator voltage pu	
					Exp	Sim	p	q
1	29	268	400	0.976	0.9325	0.956	400	228
2	29	268	350	0.9898	0.935	0.9675	476	275
3	29	268	300	0.983	0.9387	0.958	520	300
4	29	280	400	0.9458	0.9162	0.922	343	200
5	29	280	350	0.9518	0.92	0.93	400	220
6	29	280	300	0.9585	0.9262	0.9341	470	270
7	29	230	400	0.97	0.9312	0.951	362	210
8	29	230	350	0.975	0.935	0.952	414	240
9	29	230	300	0.9906	0.9425	0.965	513	300
10	27	206	400	1.018	0.9512	0.9981	414	240
11	27	206	350	1.0032	0.97	0.982	428	250
12	27	206	300	1.0314	0.9687	1.005	568	325
13	25.6	200	400	1.028	0.9875	0.008	410	237
14	25.6	200	350	1.0316	0.98	1.01	466	269
15	25.6	200	300	1.036	0.9887	1.012	537	310
16	24.6	200	400	1.0434	0.9925	1.0236	425	245
17	24.6	200	350	1.0488	0.99	1.0265	488	280
18	24.6	200	300	1.0436	0.995	1.0192	534	307

Table 3 shows the changes in the frequency as the value of Csh, Cse and speed is changed.

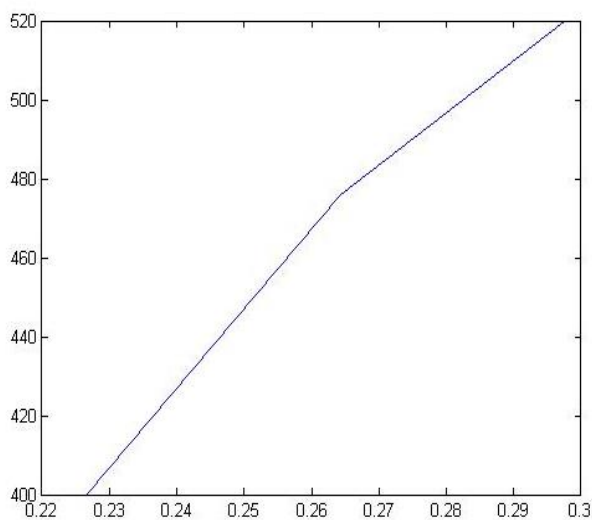
**Fig. 5: Plot of Active Power Vs Load Current.**

Figure 5 Shows the changes in the Active Power P in Watts with respect to load current I in pu for the first three set of load values as mentioned in the Table 3. It is seen that the graph is linear.

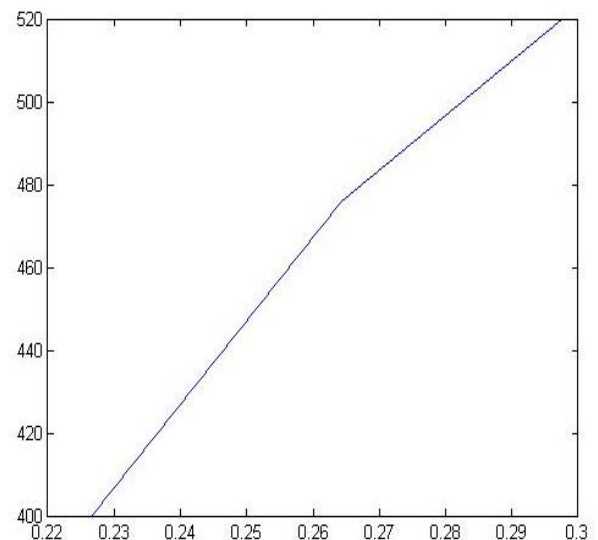
**Fig. 6: Plot of Reactive Power Vs Load Current.**

Figure 6 shows the variation in Reactive Power Q as the load is changed. This graph is also plotted for the first three set of values as mentioned in Table 3. This graph is also linear.

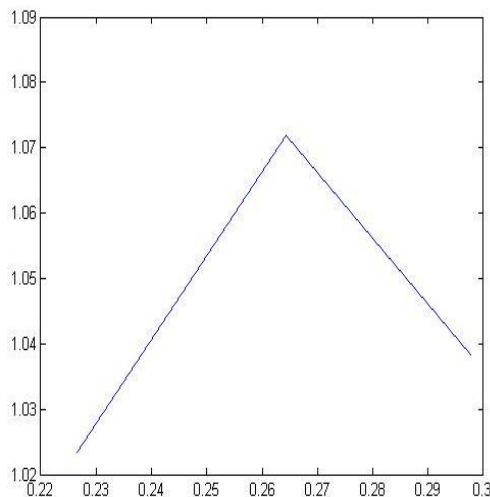


Fig. 7: Plot of Stator Current Vs load Current.

This graph is plotted for as per the values mentioned in Table 1 and Table 2 for the first three set of values.

CONCLUSION

In this paper the analysis for the long shunt configuration is carried out. Due to the series compensation the voltage of SEIG can be regulated for a wide range. The results are verified by changing simultaneously the value of load, Csh, W and the value of Cse changes correspondingly. Experimental results and Simulated results are verified.

APPENDIX

The specification of the machine are taken from^[6] SEIG 3-phase, 4-pole, 50 Hz, Star connected, squirrel cage induction machine 75 W/1 HP, 380 V, 1.9 A

PARAMETERS

$$R_1 = 0.0823, R_2 = 0.0696, X_1 = X_2 = 0.0766$$

Base values

Base voltage = 219.3 V

Base current = 1.9 A

Base impedance = 115.4 Ω

Base frequency = 50 Hz

Base speed = 1500 rpm

The variation of magnetizing reactance with air gap voltage at rated frequency for the induction machine is given below.

$$\begin{aligned} X_m < 169.2 \quad E_1 &= 512.69 - 2.13X_m \\ 179.42 > X_m &\geq 169.20 \quad E_1 \\ &= 891.66 - 4.37X_m \\ 184.46 > X_m &\geq 179.42 \quad E_1 \\ &= 785.79 - 3.78X_m \\ X_m &\geq 184.46 \quad E_1 = 0 \end{aligned}$$

NOMENCLATURE

Csh: Shunt capacitance

Cse: Series capacitance

V: Load Voltage in pu

I: Load current in pu

Vabc: terminal voltage of SEIG in pu

Iabc: Current generated by SEIG in pu

Freq: Frequency in pu

P: Load active power in Watts

Q: Load reactive power in Vars

W: Rotor speed in pu

Sim: Simulated value in pu

Exp: Experimental value in pu

REFERENCES

1. Chan T.F. Capacitance requirement of induction generators. *IEEE Trans. Energy Conversion*. 1993 June; 8(2): 304–11p.
2. Wang Li, Yi Su Jian. Effect of Long shunt and Short shunt connections on voltage variations of a Self-Excited Induction Generators. *IEEE Trans. Energy Conversion*. 1997 Dec; 12(4): 368–74p.
3. Wang Li, Lee Ching-Huei. Dynamic analysis of parallel operated Self Excited Induction Generators feeding an Induction motor load. *IEEE Trans. Energy Conversion*. 1997 Dec; 14(3): 479–85p.
4. Kalyan K., Swati E., Ravindra. C. Voltage stability of Isolated Self Excited Induction Generator(SEIG) for Variable speed applications using Matlab/Simulink. *IJEAT*. 2012 Feb; 1(3): 184–90p.
5. Faisal M.K., Rizwan M.K., Iqbal A. Performance Analysis of Shunt, Short

- Shunt and Long Shunt Self Excited Induction Generators. *IEEE International Conference on Power Electronics, Drives and Energy Systems* 2012 Dec; 16–9p.
6. Joshi D., Sandhu K.S., Soni M.K. Constant voltage constant frequency operation of Self excited induction generators. *IEEE Trans. Energy Conversion*. 2006 March; 21(1): 228–34p.
 7. Olorunfemi O. Performance of Self excited Single Phase Induction Generators with Shunt, Short Shunt and Long Shunt Excitation Connections. *IEEE Trans. Energy Conversion*. 1996 Sep; 11(3): 477–82p.
 8. Shridhar L., Singh B., Jha C.S., et al. Selection of capacitors for the self regulated Short Shunt self Excited Induction Generators. *IEEE Transactions on Energy Conversion*. 1995 March; 10(1): 10–7p.